


DUAL CHAIN DRIVE ACTUATOR 1200N 24V



STROKE: 50/100/150/200/250/300/350/400/450/500/550/600/650/700/750/800 mm

Applications:

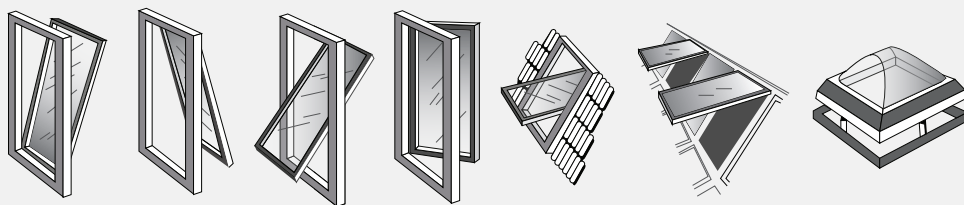


Technical Feature:

- Two Motors And Two Chains Design For Wide And Heavy Window
- Flexible Stroke / Force / Speed Adjustment
- Double Link Chain / Stainless Steel Chain Is Available
- Electronic Overload Cutoff Protection
- Automatic Stop Protection For The Obstacle
- Synchronizing Moves When Joined Groups
- Flexible Mounting Brackets For Installation
- Low Noise Operation And Operate Smooth ,Stable
- Locking Force In Static Motion is 90,00N



Technical Drawing :

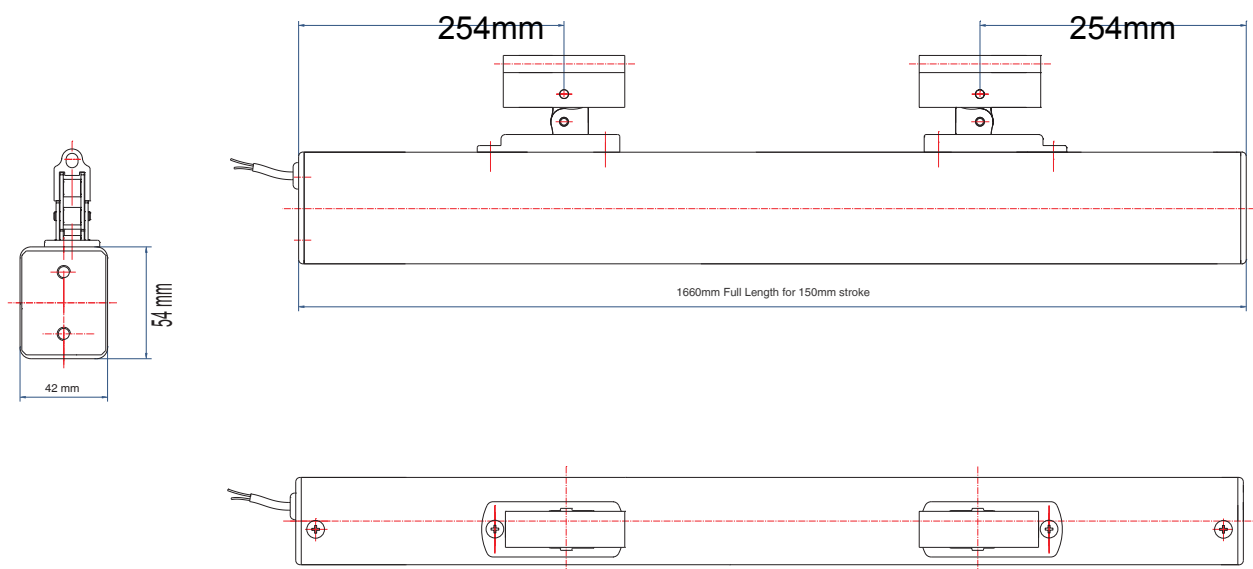

Technical Data :

ACTUATOR	ENCO1200	
TYPE	Motorized	
ACTUATOR TYPE	Chain opening	
VOLTAGE (all $\pm 5\%$)	DC 24V	
MAXIMUM OPERATING CURRENT	3.0A	
STROKE	50 /100 /150 /200 /250 /300 /350 /400 /450 / 500 /550 /600 /650 /700 /750 /800 mm	
OPERATING SPEED	10mm/sec	
AMBIENT OPERATING TEMP	$-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$	
THRUST /PULL FORCE	10. . N	
PROTECTION DEGREE	IP 32	
PRODUCT LIFE	10,000 times	
BRACKET	Standard	

Standard finish is anodised aluminium, which can be powder coated from a range of standard RAL colours if required



COLT ENGINEERING SDN BHD

Contact Us :

Penang Head Office :

C-21-1, Persiaran Bayan Indah, Bayan Bay, Sungai Nibong, 11900 Penang

Tel: +604-644 8888

Fax: +604-644 3333

Email: enquiries@coltfire.com

Kuala Lumpur Office :

B-G-19, Block B, Merchant Square Tropicana, No.1, Jalan Tropicana Selatan 1,
47410 Petaling Jaya, Selangor

Tel: +603-7610 2030

Fax: +603-7887 9833

Email: colt.kl@coltfire.com