




# SKYVENT WINDOW ACTUATOR

DUAL CHAIN ACTUATOR 800N 24V

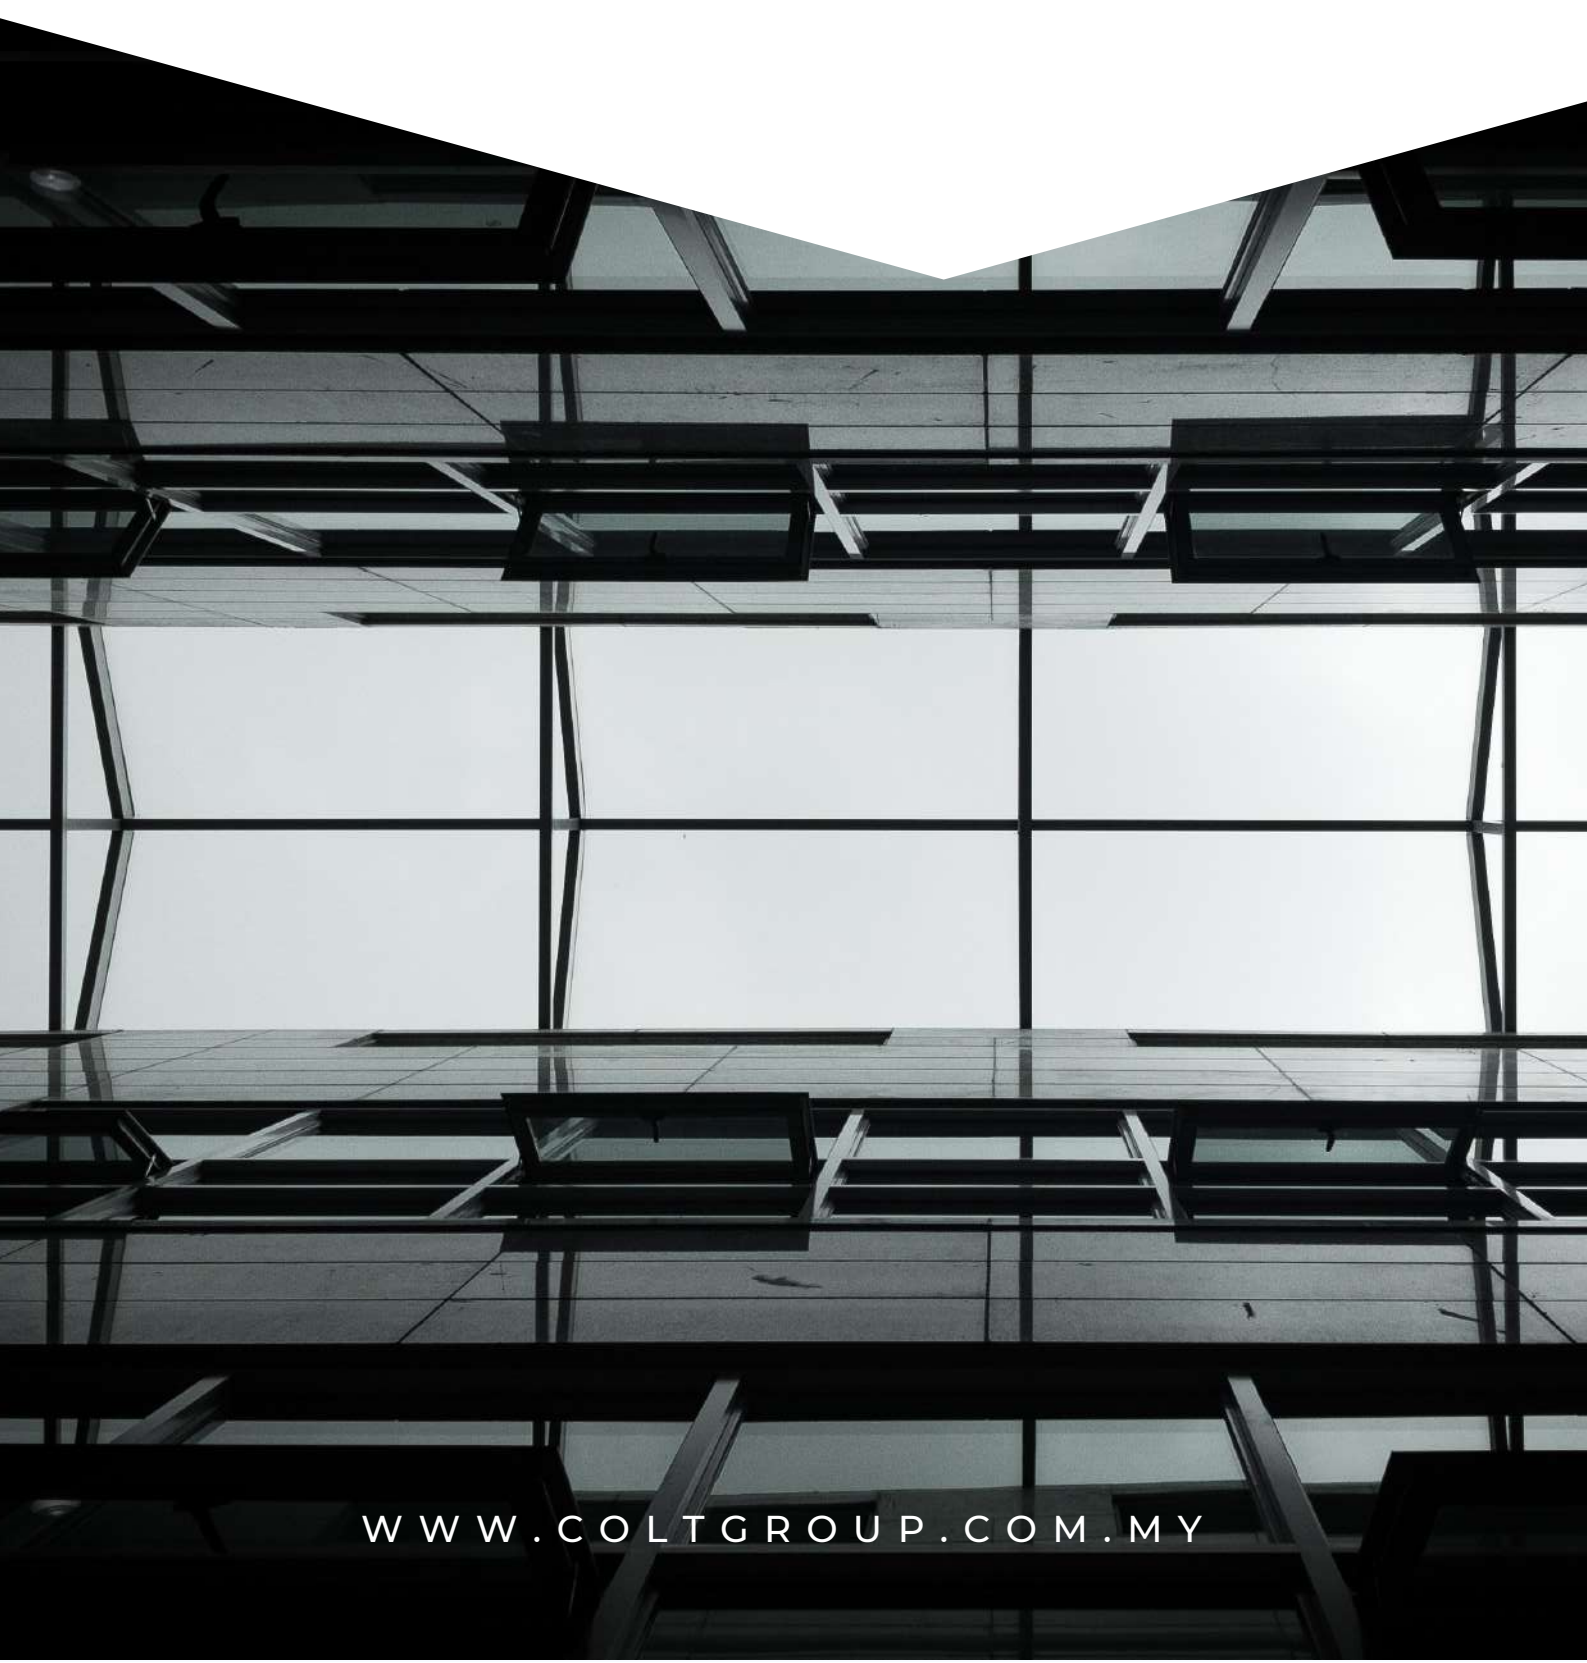

[WWW.COLTGROUP.COM.MY](http://WWW.COLTGROUP.COM.MY)

# Dual Chain Drive Actuator

## 800N 24V

STROKE: 600MM



### Technical Feature:

- Two motors & two chains design for
- Flexible stroke/ force/ speed adjustment
- Double link chain/ Stainless steel chain is available
- Electronic overload cutoff protection
- Automatic stop protection for the obstacle
- Synchronizing moves when joined groups
- Flexible mounting brackets for installation
- Low noise operation and operate smooth & stable
- Locking force in static motion is 90,000N



ACTUATOR	COLT 1200N
TYPE	MOTORIZED
ACTUATOR TYPE	CHAIN OPENING-600MM
VOLTAGE (all $\pm 5\%$ )	DC 24V
MAXIMUM OPERATING CURRENT	3.0A
STROKE	600 MM
OPERATING SPEED	10MM/SEC
AMBIENT OPERATING TEMP	-20 °C ~ + 60°C
THRUST/PULL FORCE	800N
PROTECTION DEGREE	IP 32
PRODUCT LIFE	10,000 TIMES
BRACKET	STANDARD



### COLT ENGINEERING SDN BHD (183319-H)

B-G-19 Block B Merchant Square Tropicana, No 1, Jalan Tropicana Selatan 1  
47410 Petaling Jaya, Selangor

Tel : +603-7610 2030

Fax : +603-7887 9833


Email : colt.kl@coltfire.com

[www.coltgroup.com.my](http://www.coltgroup.com.my)



# SKYVENT WINDOW ACTUATOR

DUAL CHAIN ACTUATOR 1200N 24V

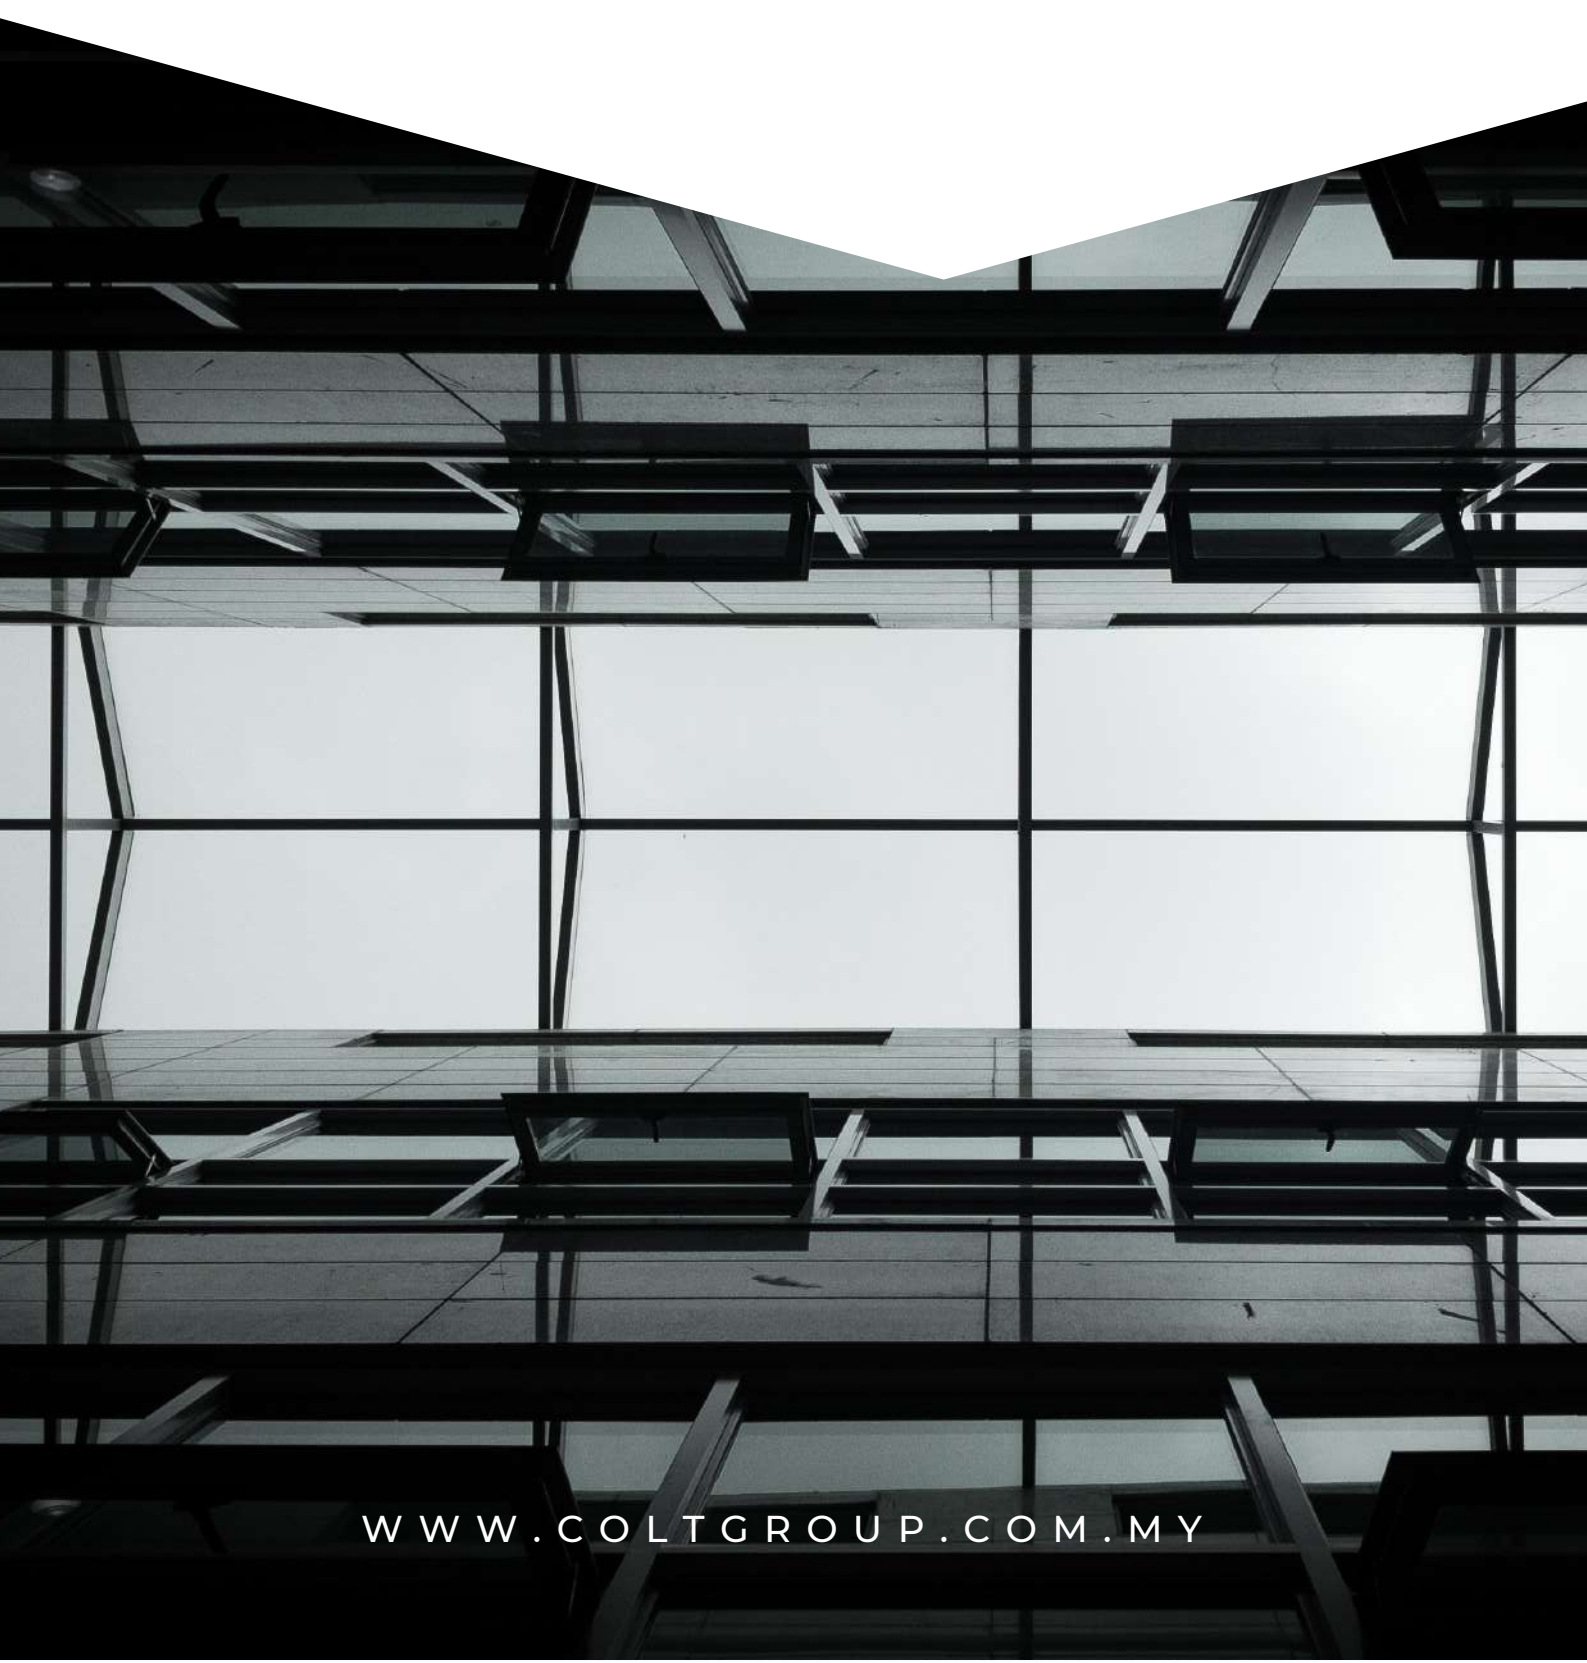

[WWW.COLTGROUP.COM.MY](http://WWW.COLTGROUP.COM.MY)

# Dual Chain Drive Actuator

## 1200N 24V

STROKE: 50/100/150/200/250/300/400/450  
500/550/600/650/700/750/800mm



### Technical Feature:

- Two motors & two chains design for
- Flexible stroke/ force/ speed adjustment
- Double link chain/ Stainless steel chain is available
- Electronic overload cutoff protection
- Automatic stop protection for the obstacle
- Synchronizing moves when joined groups
- Flexible mounting brackets for installation
- Low noise operation and operate smooth & stable
- Locking force in static motion is 90,000N

ACTUATOR	COLT 1200N
TYPE	MOTORIZED
ACTUATOR TYPE	CHAIN OPENING
VOLTAGE (all $\pm 5\%$ )	DC 24V
MAXIMUM OPERATING CURRENT	3.0A
STROKE	50~800 MM
OPERATING SPEED	10MM/SEC
AMBIENT OPERATING TEMP	-20 °C ~ + 60°C
THRUST/PULL FORCE	1200N
PROTECTION DEGREE	IP 32
PRODUCT LIFE	10,000 TIMES
BRACKET	STANDARD



### COLT ENGINEERING SDN BHD (183319-H)

B-G-19 Block B Merchant Square Tropicana, No 1, Jalan Tropicana Selatan 1  
47410 Petaling Jaya, Selangor

Tel : +603-7610 2030

Fax : +603-7887 9833

Email : colt.kl@coltfire.com

[www.coltgroup.com.my](http://www.coltgroup.com.my)